



**UTHM**  
Universiti Tun Hussein Onn Malaysia

**UNIVERSITI TUN HUSSEIN ONN MALAYSIA**

**FINAL EXAMINATION  
SEMESTER II  
SESSION 2017/2018**

COURSE NAME : MICROPROCESSOR AND  
MICROCONTROLLER

COURSE CODE : BEC 30403

PROGRAMME CODE : BEJ

EXAMINATION DATE : JUNE / JULY 2018

DURATION : 3 HOURS

INSTRUCTION : ANSWER ALL QUESTIONS

**TERBUKA**

THIS QUESTION PAPER CONSISTS OF SEVENTEEN (17) PAGES

- Q1** (a) (i) Explain the difference between General Purpose Register (GPR) and Special Function Register (FSR). (3 marks)
- (ii) Give example for both types of register in term of either address or name. (2 marks)
- (b) Suppose a designer needs to develop a simple application for children to learn the addition operation. The specifications of the design are as follows:
- There are three buttons to insert the value. Button 1 is connected to RB0, button 2 is connected to RB1 and button 3 is connected to RB2.
  - Button 1 is used to insert value '6' to the address 23H, and button 2 is used to insert value '5' to address 24H. Button 3 is used for the addition operation.
  - The result should be displayed on the 8 LEDs connected to PORTC.

Based on the given specifications,

- (i) Devise a program for the application by using a flowchart. (4 marks)
- (ii) Write a complete program for the application. (10 marks)
- (c) Based on **Q1(b)**, what will happen if file registers 05H and 06H are used for the addition operation rather than file registers 23H and 24H. (3 marks)
- (d) Create a macro to move a literal number into any file register. (3 marks)
- Q2** (a) Briefly explain the concept of subroutine in assembly language programming. (5 marks)
- (b) Analyze the assembly program in **Listing Q2 (b)**, then, answer the following questions.
- (i) Explain the purpose of the following instructions in the program.

```
BSF STATUS, RP0
BCF STATUS, RP1
```



- (2 marks)
- (ii) Modify the instructions in **Q2 (b) (i)** to construct subroutines for accessing Bank 0 and Bank 1. Name the subroutine for accessing Bank 0 and Bank 1 as BANK0 and BANK1, respectively. (3 marks)
- (iii) What are INTF and INTE? Discuss the role for these bits in the program. (4 marks)

- (iv) Explain the operation of the main loop (from label MAIN to LOOP). (6 marks)
- (v) Explain the operation in the interrupt service routine (ISR). (5 marks)

```

;Register label equates
PORTB EQU 06H ;PORTB data register
INTCON EQU 0BH ;Interrupt control register
STATUS EQU 03H
TRISB EQU 86H
ADCON1 EQU 9FH
OPTION_REG EQU 81H

;Input bit equates
INTF EQU 1H ;RBO interrupt flag
RPO EQU 5H
RP1 EQU 6H
INTE EQU 4H
GIE EQU 7H

ORG 00H
GOTO MAIN
ORG 04H
GOTO ISR

MAIN BSF STATUS, RPO
      BCF STATUS, RP1
      MOVLW b'00000001'
      MOVWF TRISB
      MOVLW b'10000000'
      MOVWF OPTION_REG
      BCF STATUS, RPO
      CLRF PORTB
      BSF PORTB, 7
      BSF INTCN, INTE
      BSF INTCN, GIE

LOOP GOTO LOOP

ISR BCF INTCN, INTF
    BTFSS PORTB, 7
    GOTO Lab1
    BCF PORTB, 7
    RETFIE


Lab1 BSF PORTB, 7
      RETFIE
      END
    
```

**Listing Q2 (b)**

**Q3 (a)** For the signal shown in **Figure Q3 (a)**,

- (i) Determine the value of  $T$ , for serial communication with transmission rate of 9600 baud. The system used one start bit, one stop bit and no parity bit. What are the maximum characters that can be sent in one second?

(3 marks)

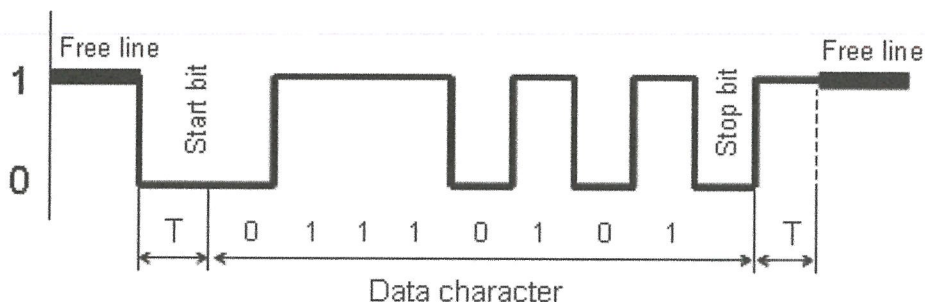

**Figure Q3 (a)**

- (ii) Write a sequence of instruction to initialize the PIC16F877A USART module by suggesting the suitable values to be used in TXSTA, RCSTA and SPBRG registers respectively. Given that the clock frequency is 4MHz.

(7 marks)

(b) **Figure Q3 (b)** shows an application using a 4×3 keypad to key in a password to drive the DC motor using a PWM signal from RC2. The DC motor will be operating and the LED which is connected to RD0 will be turned ON when the correct password (“1234”) is supplied. If the user enters the wrong password, then the motor will not move and the LED will remain OFF. Based on the given specifications, answer the following questions:

- (i) Determine the values to be loaded in file register PR2 if the desired PWM frequency is 20kHz. Then, determine the values in the file registers: CCP1: CCP1CON<5:4> to generate a 30% duty cycle PWM signal, when prescaler 4 is selected.

(7 marks)

- (ii) Write a sequence of instruction to initialize the PWM module to produce PWM's frequency of 20kHz.

(5 marks)

- (iii) Write a sequence of instruction to initialize PORTs that are connected to the keypad.

(3 marks)

TERBUKA

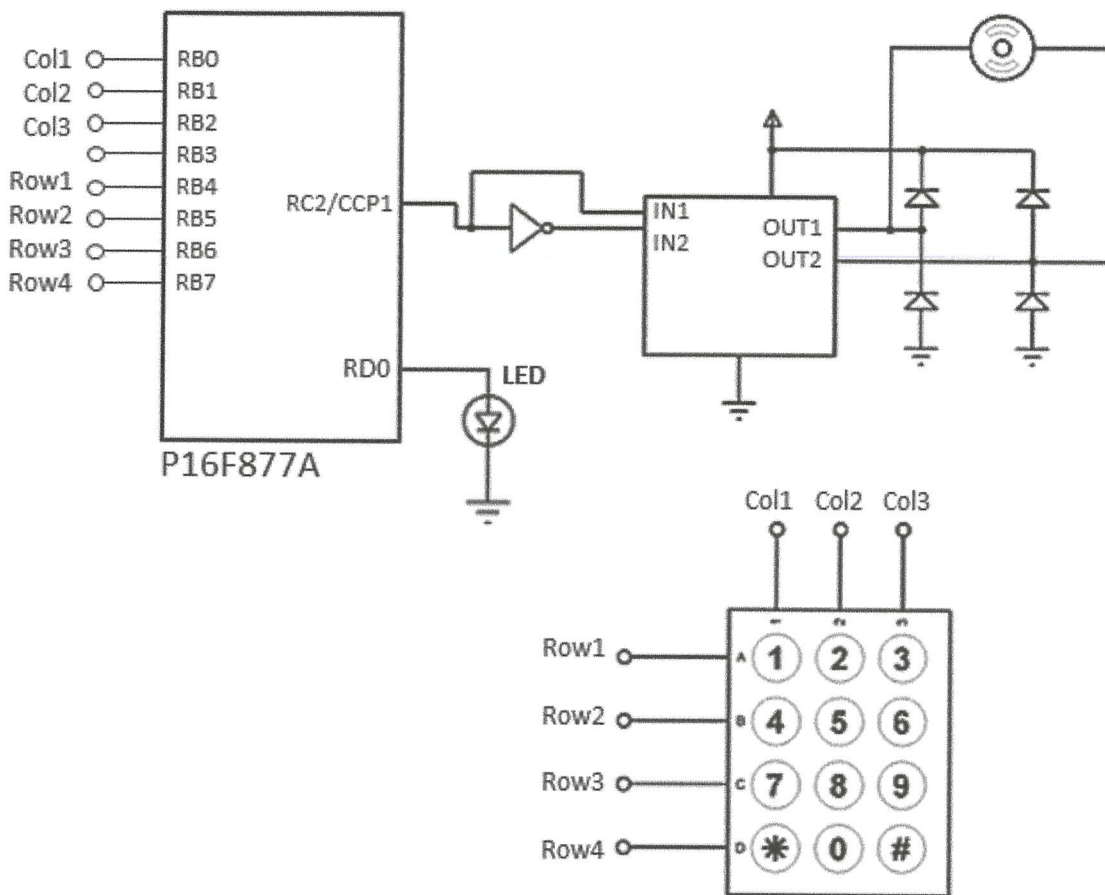


Figure Q3 (b)


- Q4** (a) Suppose you are required to design a water quality system for a fish aquarium that consists of the temperature, pH, and total dissolved solids (TDS) monitoring system. Suggest the suitable platform (microprocessor or microcontroller) to be implemented in the proposed system. Explain your choice by considering the processing requirements and cost. (4 marks)
- (b) Sketch a simple microprocessor system by showing its important components. Also, show all the buses that connect all the components. (4 marks)
- (c) By referring to the programmer's model of the 8086 microprocessor in **Figure Q4 (c)**, answer the following questions:
- (i) Explain why the 8086 microprocessor needs two registers (i.e. DS and SI) to store an address. (3 marks)
- (ii) If the Code Segment (CS) and Instruction Pointer (IP) registers contain 2400H and 0200H respectively, state the physical address that will be generated by the microprocessor. (2 marks)

TERBUKA

- (iii) By using the same value of CS and IP from **Q4 (c) (ii)**, determine the upper range and the lower range of the code segment. (2 marks)
  
- (iv) Determine the value of flags Carry (CF), Sign (SF), Parity (PF), Auxiliary Carry (AF), Zero (ZF) and Overflow (OF) in the Status Register (SR) after the 8086 microprocessor executes the following sequence of instructions.

```
MOV AL, 7EH
ADD AL, 02H
```

(5 marks)

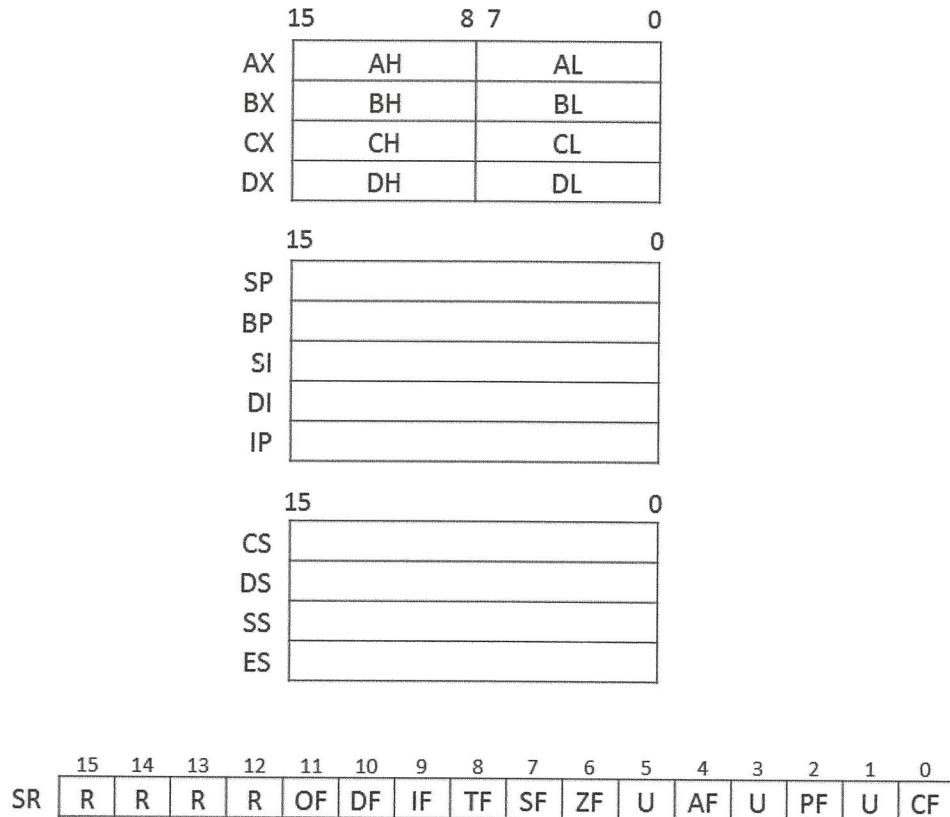

**Figure Q4 (c)**

- (d) Addressing modes are used by a microprocessor to access a particular location within the memory spaces. Write a sequence of instruction to fill in the values of 20H in memory location 0100:1000 to 0100:1200 using register indirect addressing mode. Write comment for each instruction.

(5 marks)

**- END OF QUESTIONS -**



**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER


PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**PIC16F876A/877A REGISTER FILE MAP**

File Address	File Address	File Address	File Address
Indirect addr. <sup>(*)</sup> 00h	Indirect addr. <sup>(*)</sup> 80h	Indirect addr. <sup>(*)</sup> 100h	Indirect addr. <sup>(*)</sup> 180h
TMR0 01h	OPTION_REG 81h	TMR0 101h	OPTION_REG 181h
PCL 02h	PCL 82h	PCL 102h	PCL 182h
STATUS 03h	STATUS 83h	STATUS 103h	STATUS 183h
FSR 04h	FSR 84h	FSR 104h	FSR 184h
PORTA 05h	TRISA 85h	105h	185h
PORTB 06h	TRISB 86h	PORTB 106h	TRISB 186h
PORTC 07h	TRISC 87h	107h	187h
PORTD <sup>(1)</sup> 08h	TRISD <sup>(1)</sup> 88h	108h	188h
PORTE <sup>(1)</sup> 09h	TRISE <sup>(1)</sup> 89h	109h	189h
PCLATH 0Ah	PCLATH 8Ah	PCLATH 10Ah	PCLATH 18Ah
INTCON 0Bh	INTCON 8Bh	INTCON 10Bh	INTCON 18Bh
PIR1 0Ch	PIE1 8Ch	EEDATA 10Ch	EECON1 18Ch
PIR2 0Dh	PIE2 8Dh	EEADR 10Dh	EECON2 18Dh
TMR1L 0Eh	PCON 8Eh	EEDATH 10Eh	Reserved <sup>(2)</sup> 18Eh
TMR1H 0Fh	8Fh	EEADRH 10Fh	Reserved <sup>(2)</sup> 18Fh
T1CON 10h	90h	110h	190h
TMR2 11h	SSPCON2 91h	111h	191h
T2CON 12h	PR2 92h	112h	192h
SSPBUF 13h	SSPADD 93h	113h	193h
SSPCON 14h	SSPSTAT 94h	114h	194h
CCPR1L 15h	95h	115h	195h
CCPR1H 16h	96h	116h	196h
CCP1CON 17h	97h	General Purpose Register 117h	General Purpose Register 197h
RCSTA 18h	TXSTA 98h	118h	198h
TXREG 19h	SPBRG 99h	119h	199h
RCREG 1Ah	9Ah	11Ah	19Ah
CCPR2L 1Bh	9Bh	11Bh	19Bh
CCPR2H 1Ch	CMCON 9Ch	11Ch	19Ch
CCP2CON 1Dh	CVRCON 9Dh	11Dh	19Dh
ADRESH 1Eh	ADRESL 9Eh	11Eh	19Eh
ADCON0 1Fh	ADCON1 9Fh	11Fh	19Fh
20h	A0h	120h	1A0h
General Purpose Register 96 Bytes	General Purpose Register 80 Bytes	General Purpose Register 80 Bytes	General Purpose Register 80 Bytes
7Fh	EFh	16Fh	1EFh
	F0h	170h	1F0h
	accesses 70h-7Fh	accesses 70h-7Fh	accesses 70h-7Fh
Bank 0	Bank 1	Bank 2	Bank 3
	FFh	17Fh	1FFh

■ Unimplemented data memory locations, read as '0'.  
 \* Not a physical register.

**Note 1:** These registers are not implemented on the PIC16F876A.  
**Note 2:** These registers are reserved; maintain these registers clear.



Handwritten text and stamps at the bottom right of the page.

**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**STATUS REGISTER (ADDRESS 03h, 83h, 103h, 183h)**

R/W-0	R/W-0	R/W-0	R-1	R-1	R/W-x	R/W-x	R/W-x
IRP	RP1	RP0	$\overline{TO}$	$\overline{PD}$	Z	DC	C
bit 7					bit 0		

- bit 7 **IRP:** Register Bank Select bit (used for indirect addressing)  
 1 = Bank 2, 3 (100h-1FFh)  
 0 = Bank 0, 1 (00h-FFh)
  - bit 6-5 **RP1:RP0:** Register Bank Select bits (used for direct addressing)  
 11 = Bank 3 (180h-1FFh)  
 10 = Bank 2 (100h-17Fh)  
 01 = Bank 1 (80h-FFh)  
 00 = Bank 0 (00h-7Fh)  
 Each bank is 128 bytes.
  - bit 4  **$\overline{TO}$ :** Time-out bit  
 1 = After power-up, CLRWD $\overline{T}$  instruction or SLEEP instruction  
 0 = A WDT time-out occurred
  - bit 3  **$\overline{PD}$ :** Power-down bit  
 1 = After power-up or by the CLRWD $\overline{T}$  instruction  
 0 = By execution of the SLEEP instruction
  - bit 2 **Z:** Zero bit  
 1 = The result of an arithmetic or logic operation is zero  
 0 = The result of an arithmetic or logic operation is not zero
  - bit 1 **DC:** Digit carry/borrow bit (ADDWF, ADDLW, SUBLW, SUBWF instructions)  
 (for borrow, the polarity is reversed)  
 1 = A carry-out from the 4th low order bit of the result occurred  
 0 = No carry-out from the 4th low order bit of the result
  - bit 0 **C:** Carry/borrow bit (ADDWF, ADDLW, SUBLW, SUBWF instructions)  
 1 = A carry-out from the Most Significant bit of the result occurred  
 0 = No carry-out from the Most Significant bit of the result occurred
- Note:** For borrow, the polarity is reversed. A subtraction is executed by adding the two's complement of the second operand. For rotate (RRF, RLF) instructions, this bit is loaded with either the high, or low order bit of the source register.

<b>Legend:</b>			
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown





**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND  
 MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**OPTION\_REG REGISTER (ADDRESS 81h, 181h)**

R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1	R/W-1
<b>RBP<math>\bar{U}</math></b>	<b>INTEDG</b>	<b>T0CS</b>	<b>T0SE</b>	<b>PSA</b>	<b>PS2</b>	<b>PS1</b>	<b>PS0</b>
bit 7				bit 0			

bit 7 **RBP $\bar{U}$** : PORTB Pull-up Enable bit  
 1 = PORTB pull-ups are disabled  
 0 = PORTB pull-ups are enabled by individual port latch values

bit 6 **INTEDG**: Interrupt Edge Select bit  
 1 = Interrupt on rising edge of RB0/INT pin  
 0 = Interrupt on falling edge of RB0/INT pin

bit 5 **T0CS**: TMR0 Clock Source Select bit  
 1 = Transition on RA4/T0CKI pin  
 0 = Internal instruction cycle clock (CLKO)

bit 4 **T0SE**: TMR0 Source Edge Select bit  
 1 = Increment on high-to-low transition on RA4/T0CKI pin  
 0 = Increment on low-to-high transition on RA4/T0CKI pin

bit 3 **PSA**: Prescaler Assignment bit  
 1 = Prescaler is assigned to the WDT  
 0 = Prescaler is assigned to the Timer0 module

bit 2-0 **PS2:PS0**: Prescaler Rate Select bits

Bit Value	TMR0 Rate	WDT Rate
000	1 : 2	1 : 1
001	1 : 4	1 : 2
010	1 : 8	1 : 4
011	1 : 16	1 : 8
100	1 : 32	1 : 16
101	1 : 64	1 : 32
110	1 : 128	1 : 64
111	1 : 256	1 : 128

**Legend:**  
 R = Readable bit                      W = Writable bit                      U = Unimplemented bit, read as '0'  
 - n = Value at POR                      '1' = Bit is set                      '0' = Bit is cleared                      x = Bit is unknown

TERBUKA

UNIVERSITI TEKNOLOGI MALAYSIA  
 INSTITUT TEKNIK ELEKTRO  
 KUALA LUMPUR

**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**INTCON REGISTER (ADDRESS 0Bh, 8Bh, 10Bh, 18Bh)**

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-x
GIE	PEIE	TMR0IE	INTE	RBIE	TMR0IF	INTF	RBIF
bit 7						bit 0	

- bit 7 **GIE:** Global Interrupt Enable bit  
 1 = Enables all unmasked interrupts  
 0 = Disables all interrupts
- bit 6 **PEIE:** Peripheral Interrupt Enable bit  
 1 = Enables all unmasked peripheral interrupts  
 0 = Disables all peripheral interrupts
- bit 5 **TMR0IE:** TMR0 Overflow Interrupt Enable bit  
 1 = Enables the TMR0 interrupt  
 0 = Disables the TMR0 interrupt
- bit 4 **INTE:** RB0/INT External Interrupt Enable bit  
 1 = Enables the RB0/INT external interrupt  
 0 = Disables the RB0/INT external interrupt
- bit 3 **RBIE:** RB Port Change Interrupt Enable bit  
 1 = Enables the RB port change interrupt  
 0 = Disables the RB port change interrupt
- bit 2 **TMR0IF:** TMR0 Overflow Interrupt Flag bit  
 1 = TMR0 register has overflowed (must be cleared in software)  
 0 = TMR0 register did not overflow
- bit 1 **INTF:** RB0/INT External Interrupt Flag bit  
 1 = The RB0/INT external interrupt occurred (must be cleared in software)  
 0 = The RB0/INT external interrupt did not occur
- bit 0 **RBIF:** RB Port Change Interrupt Flag bit  
 1 = At least one of the RB7:RB4 pins changed state; a mismatch condition will continue to set the bit. Reading PORTB will end the mismatch condition and allow the bit to be cleared (must be cleared in software).  
 0 = None of the RB7:RB4 pins have changed state

<b>Legend:</b>			
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown



*Faint blue text at the bottom right corner, possibly a watermark or footer.*



**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND  
 MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**PIR1 REGISTER (ADDRESS 0Ch)**

R/W-0	R/W-0	R-0	R-0	R/W-0	R/W-0	R/W-0	R/W-0
PSPIF <sup>(1)</sup>	ADIF	RCIF	TXIF	SSPIF	CCP1IF	TMR2IF	TMR1IF
bit 7						bit 0	

- bit 7 **PSPIF:** Parallel Slave Port Read/Write Interrupt Flag bit<sup>(1)</sup>  
 1 = A read or a write operation has taken place (must be cleared in software)  
 0 = No read or write has occurred  
**Note 1:** PSPIF is reserved on PIC16F873A/876A devices; always maintain this bit clear.
- bit 6 **ADIF:** A/D Converter Interrupt Flag bit  
 1 = An A/D conversion completed  
 0 = The A/D conversion is not complete
- bit 5 **RCIF:** USART Receive Interrupt Flag bit  
 1 = The USART receive buffer is full  
 0 = The USART receive buffer is empty
- bit 4 **TXIF:** USART Transmit Interrupt Flag bit  
 1 = The USART transmit buffer is empty  
 0 = The USART transmit buffer is full
- bit 3 **SSPIF:** Synchronous Serial Port (SSP) Interrupt Flag bit  
 1 = The SSP interrupt condition has occurred and must be cleared in software before returning from the Interrupt Service Routine. The conditions that will set this bit are:
  - SPI – A transmission/reception has taken place.
  - I<sup>2</sup>C Slave – A transmission/reception has taken place.
  - I<sup>2</sup>C Master
    - A transmission/reception has taken place.
    - The initiated Start condition was completed by the SSP module.
    - The initiated Stop condition was completed by the SSP module.
    - The initiated Restart condition was completed by the SSP module.
    - The initiated Acknowledge condition was completed by the SSP module.
    - A Start condition occurred while the SSP module was Idle (multi-master system).
    - A Stop condition occurred while the SSP module was Idle (multi-master system).
 0 = No SSP interrupt condition has occurred
- bit 2 **CCP1IF:** CCP1 Interrupt Flag bit  
Capture mode:  
 1 = A TMR1 register capture occurred (must be cleared in software)  
 0 = No TMR1 register capture occurred  
Compare mode:  
 1 = A TMR1 register compare match occurred (must be cleared in software)  
 0 = No TMR1 register compare match occurred  
PWM mode:  
 Unused in this mode.
- bit 1 **TMR2IF:** TMR2 to PR2 Match Interrupt Flag bit  
 1 = TMR2 to PR2 match occurred (must be cleared in software)  
 0 = No TMR2 to PR2 match occurred
- bit 0 **TMR1IF:** TMR1 Overflow Interrupt Flag bit  
 1 = TMR1 register overflowed (must be cleared in software)  
 0 = TMR1 register did not overflow

TERBUKA

<b>Legend:</b>		
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared, x = Bit is unknown



**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**T2CON: TIMER2 CONTROL REGISTER (ADDRESS 12h)**

U-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0
—	TOUTPS3	TOUTPS2	TOUTPS1	TOUTPS0	TMR2ON	T2CKPS1	T2CKPS0
bit 7							bit 0

- bit 7 **Unimplemented:** Read as '0'
- bit 6-3 **TOUTPS3:TOUTPS0:** Timer2 Output Postscale Select bits  
 0000 = 1:1 postscale  
 0001 = 1:2 postscale  
 0010 = 1:3 postscale  
 .  
 .  
 .  
 1111 = 1:16 postscale
- bit 2 **TMR2ON:** Timer2 On bit  
 1 = Timer2 is on  
 0 = Timer2 is off
- bit 1-0 **T2CKPS1:T2CKPS0:** Timer2 Clock Prescale Select bits  
 00 = Prescaler is 1  
 01 = Prescaler is 4  
 1x = Prescaler is 16

<b>Legend:</b>			
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown

**BAUD RATE FORMULA**

SYNC	BRGH = 0 (Low Speed)	BRGH = 1 (High Speed)
0	(Asynchronous) Baud Rate = Fosc/(64 (X + 1))	Baud Rate = Fosc/(16 (X + 1))
1	(Synchronous) Baud Rate = Fosc/(4 (X + 1))	N/A

**Legend:** X = value in SPBRG (0 to 255)

**REGISTERS ASSOCIATED WITH BAUD RATE GENERATOR**

Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Value on: POR, BOR	Value on all other Resets
98h	TXSTA	CSRC	TX9	TXEN	SYNC	—	BRGH	TRMT	TX9D	0000 -010	0000 -010
18h	RCSTA	SPEN	RX9	SREN	CREN	ADDEN	FERR	OERR	RX9D	0000 000x	0000 000x
99h	SPBRG	Baud Rate Generator Register								0000 0000	0000 0000

**Legend:** x = unknown, - = unimplemented, read as '0'. Shaded cells are not used by the BRG.



**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**TXSTA: TRANSMIT STATUS AND CONTROL REGISTER (ADDRESS 98h)**

R/W-0	R/W-0	R/W-0	R/W-0	U-0	R/W-0	R-1	R/W-0
CSRC	TX9	TXEN	SYNC	—	BRGH	TRMT	TX9D
bit 7							bit 0

- bit 7 **CSRC:** Clock Source Select bit  
Asynchronous mode:  
 Don't care.  
Synchronous mode:  
 1 = Master mode (clock generated internally from BRG)  
 0 = Slave mode (clock from external source)
- bit 6 **TX9:** 9-bit Transmit Enable bit  
 1 = Selects 9-bit transmission  
 0 = Selects 8-bit transmission
- bit 5 **TXEN:** Transmit Enable bit  
 1 = Transmit enabled  
 0 = Transmit disabled  
**Note:** SREN/CREN overrides TXEN in Sync mode.
- bit 4 **SYNC:** USART Mode Select bit  
 1 = Synchronous mode  
 0 = Asynchronous mode
- bit 3 **Unimplemented:** Read as '0'
- bit 2 **BRGH:** High Baud Rate Select bit  
Asynchronous mode:  
 1 = High speed  
 0 = Low speed  
Synchronous mode:  
 Unused in this mode.
- bit 1 **TRMT:** Transmit Shift Register Status bit  
 1 = TSR empty  
 0 = TSR full
- bit 0 **TX9D:** 9th bit of Transmit Data, can be Parity bit

<b>Legend:</b>			
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown



WAKIL RA KADIN BUKA AGRO...  
 ...  
 ...  
 ...

**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER


PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**RCSTA: RECEIVE STATUS AND CONTROL REGISTER (ADDRESS 18h)**

R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R-0	R-0	R-x
SPEN	RX9	SREN	CREN	ADDEN	FERR	OERR	RX9D
bit 7						bit 0	

- bit 7 **SPEN:** Serial Port Enable bit  
 1 = Serial port enabled (configures RC7/RX/DT and RC6/TX/CK pins as serial port pins)  
 0 = Serial port disabled
- bit 6 **RX9:** 9-bit Receive Enable bit  
 1 = Selects 9-bit reception  
 0 = Selects 8-bit reception
- bit 5 **SREN:** Single Receive Enable bit  
Asynchronous mode:  
 Don't care.  
Synchronous mode – Master:  
 1 = Enables single receive  
 0 = Disables single receive  
 This bit is cleared after reception is complete.  
Synchronous mode – Slave:  
 Don't care.
- bit 4 **CREN:** Continuous Receive Enable bit  
Asynchronous mode:  
 1 = Enables continuous receive  
 0 = Disables continuous receive  
Synchronous mode:  
 1 = Enables continuous receive until enable bit CREN is cleared (CREN overrides SREN)  
 0 = Disables continuous receive
- bit 3 **ADDEN:** Address Detect Enable bit  
Asynchronous mode 9-bit (RX9 = 1):  
 1 = Enables address detection, enables interrupt and load of the receive buffer when RSR<8> is set  
 0 = Disables address detection, all bytes are received and ninth bit can be used as parity bit
- bit 2 **FERR:** Framing Error bit  
 1 = Framing error (can be updated by reading RCREG register and receive next valid byte)  
 0 = No framing error
- bit 1 **OERR:** Overrun Error bit  
 1 = Overrun error (can be cleared by clearing bit CREN)  
 0 = No overrun error
- bit 0 **RX9D:** 9th bit of Received Data (can be parity bit but must be calculated by user firmware)

<b>Legend:</b>			
R = Readable bit	W = Writable bit	U = Unimplemented bit, read as '0'	
- n = Value at POR	'1' = Bit is set	'0' = Bit is cleared	x = Bit is unknown





**FINAL EXAMINATION**

SEMESTER / SESSION : SEM II / 2017/2018  
 COURSE : MICROPROCESSOR AND MICROCONTROLLER

PROGRAMME : BEJ  
 COURSE CODE : BEC 30403

**Instruction Set Summary**

Mnemonic, Operands	Description	Cycles	14-Bit Opcode				Status Affected	Notes	
			MSb		LSb				
<b>BYTE-ORIENTED FILE REGISTER OPERATIONS</b>									
ADDWF	f, d	Add W and f	1	00	0111	dfff	ffff	C,DC,Z	1,2
ANDWF	f, d	AND W with f	1	00	0101	dfff	ffff	Z	1,2
CLRF	f	Clear f	1	00	0001	1fff	ffff	Z	2
CLRWF	-	Clear W	1	00	0001	0xxx	xxxx	Z	
COMF	f, d	Complement f	1	00	1001	dfff	ffff	Z	1,2
DECf	f, d	Decrement f	1	00	0011	dfff	ffff	Z	1,2
DECFSZ	f, d	Decrement f, Skip if 0	1(2)	00	1011	dfff	ffff		1,2,3
INCF	f, d	Increment f	1	00	1010	dfff	ffff	Z	1,2
INCFSZ	f, d	Increment f, Skip if 0	1(2)	00	1111	dfff	ffff		1,2,3
IORWF	f, d	Inclusive OR W with f	1	00	0100	dfff	ffff	Z	1,2
MOVf	f, d	Move f	1	00	1000	dfff	ffff	Z	1,2
MOVWF	f	Move W to f	1	00	0000	1fff	ffff		
NOP	-	No Operation	1	00	0000	0xxx0	0000		
RLF	f, d	Rotate Left f through Carry	1	00	1101	dfff	ffff	C	1,2
RRF	f, d	Rotate Right f through Carry	1	00	1100	dfff	ffff	C	1,2
SUBWF	f, d	Subtract W from f	1	00	0010	dfff	ffff	C,DC,Z	1,2
SWAPf	f, d	Swap nibbles in f	1	00	1110	dfff	ffff		1,2
XORWF	f, d	Exclusive OR W with f	1	00	0110	dfff	ffff	Z	1,2
<b>BIT-ORIENTED FILE REGISTER OPERATIONS</b>									
BCF	f, b	Bit Clear f	1	01	00bb	bfff	ffff		1,2
BSF	f, b	Bit Set f	1	01	01bb	bfff	ffff		1,2
BTFSC	f, b	Bit Test f, Skip if Clear	1(2)	01	10bb	bfff	ffff		3
BTFSS	f, b	Bit Test f, Skip if Set	1(2)	01	11bb	bfff	ffff		3
<b>LITERAL AND CONTROL OPERATIONS</b>									
ADDLW	k	Add Literal and W	1	11	111x	kkkk	kkkk	C,DC,Z	
ANDLW	k	AND Literal with W	1	11	1001	kkkk	kkkk	Z	
CALL	k	Call Subroutine	2	10	0kkk	kkkk	kkkk		
CLRWDt	-	Clear Watchdog Timer	1	00	0000	0110	0100	$\overline{TO,PD}$	
GOTO	k	Go to Address	2	10	1kkk	kkkk	kkkk		
IORLW	k	Inclusive OR Literal with W	1	11	1000	kkkk	kkkk	Z	
MOVLW	k	Move Literal to W	1	11	00xx	kkkk	kkkk		
RETFIE	-	Return from Interrupt	2	00	0000	0000	1001		
RETLW	k	Return with Literal in W	2	11	01xx	kkkk	kkkk		
RETURN	-	Return from Subroutine	2	00	0000	0000	1000		
SLEEP	-	Go into Standby mode	1	00	0000	0110	0011	$\overline{TO,PD}$	
SUBLW	k	Subtract W from Literal	1	11	110x	kkkk	kkkk	C,DC,Z	
XORLW	k	Exclusive OR Literal with W	1	11	1010	kkkk	kkkk	Z	

TERBUKA