



UNIVERSITI TUN HUSSEIN ONN MALAYSIA

FINAL EXAMINATION

SEMESTER II

SESSION 2016 / 2017

COURSE NAME : SOLID MECHANICS I
COURSE CODE : BDA 10903
PROGRAMME : BDD
EXAMINATION DATE : JUNE 2017
DURATION : 3 HOURS
INSTRUCTION : PART A: ANSWER **THREE (3)**
QUESTIONS ONLY
PART B: ANSWER **ALL** QUESTIONS

THIS QUESTION PAPER CONSISTS OF **EIGHT (8)** PAGES

CONFIDENTIAL

PART A (OPTIONAL):

Answer **THREE (3)** questions **ONLY**.

- Q1.** The hanger assembly as shown in **Figure Q1(a)** is used to support a distributed loading of w . If the allowable tensile stress of $\sigma_{\text{allow}} = 150 \text{ MPa}$ is not exceeded in the 15 mm diameter rod AB , and an allowable shear stress of $\tau_{\text{allow}} = 100 \text{ MPa}$ is not exceeded in the 12 mm diameter bolts at A and B . Determine:-
- the intensity of maximum distributed load w that can be supported by the hanger assembly
(5 marks)
 - draw bending moment diagram and specify where the maximum bending moment occurs in beam
(9 marks)
 - if the inverted-T beam has dimension as shown in **Figure Q1(b)**, find the maximum tensile stress in beam due to bending
(6 marks)
- Q2.** (a) The simple beam AB shown in the **Figure Q2 (a)** is subjected to a concentrated load P and a couple $M_1 = PL/4$ acting at the position indicated. Draw the shear force and bending moment diagram for this beam
(12 marks)
- (b) Two load P and $2P$ are separated by fix distance, d as shown in **Figure Q2 (b)**. The load may be placed at any distance x from the left hand support of the beam. Determine the distance x for maximum bending moment in the beam if $P = 6 \text{ kN}$, $d = 1.6 \text{ m}$ and $L = 8 \text{ m}$.
(8 marks)
- Q3.** The beam shown in **Figure Q3** is made of wood. If it is subjected to an internal moment of $M = 3 \text{ kN/m}$,
- Determine the location of C (centroid) of the cross section where the neutral axis passes through.
(3 marks)
 - Determine the moment of inertia of the cross section
(5 marks)
 - Determine the maximum tensile and compressive stress in the beam
(10 marks)
 - Sketch the bending stress distribution on the cross section.
(2 marks)
- Q4.** The design of the gear and shaft system as shown in **Figure Q4** requires that steel shafts of the same diameter be used for both AB and CD . It is further required that $\tau_{\text{max}} \leq 60 \text{ MPa}$ and that the angle θ_D through which end D of shaft CD rotates not exceed 1.5° . Knowing that $G = 77 \text{ GPa}$, determine the required diameter of the shafts.
(20 Marks)

CONFIDENTIAL

PART B (COMPULSORY):

Answer ALL questions.

Q5. The steel pressure tank shown in **Figure Q5** has a 750 mm inner diameter and a 9 mm wall thickness. Knowing that the butt welded seams form an angle $\beta = 50^\circ$ with the longitudinal axis of the tank and that the gage pressure in the tank is 1.4 MPa,

(a) determine the normal stress perpendicular to the weld (10 marks)

(b) determine the shearing stress parallel to the weld (10 marks)

Q6. Two forces P_1 and P_2 , with a magnitude of $P_1 = 15$ kN and $P_2 = 18$ kN, are applied as shown in **Figure Q6 (a)** to the end A of bar AB , which is welded to a cylindrical member BD of radius $c = 20$ mm. Knowing that the distance from A to the axis of member BD is $a = 50$ mm and assuming that all stresses remain below the proportional limit of the material. Also, given the normal and shearing stresses at point K of the transverse section of member BD located at a distance $b = 60$ mm from end B , as shown in **Figure Q6 (b)**. Determine,

(a) The principle planes and principle stresses at point K by using Mohr's Circle (10 Marks)

(b) The maximum shearing stress at point K from diagram in 6(a), and (4 marks)

(c) Sketch the orientation of the principle planes (6 marks)

- END OF QUESTION -

FINAL EXAMINATION

SEMESTER/SESSION : SEM II /2016/2017
 COURSE NAME : SOLID MECHANICS I

PROGRAMME : BDD
 COURSE CODE : BDA10903

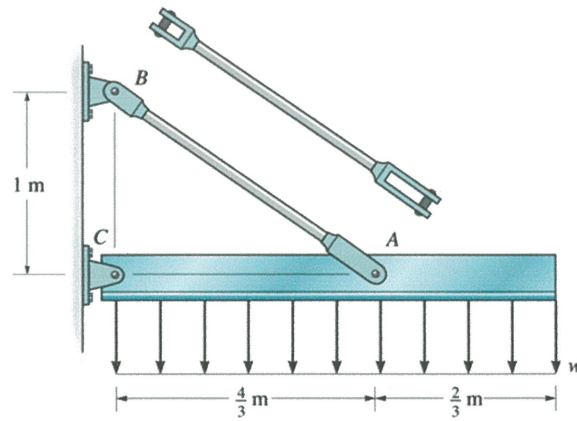


Figure Q1(a)

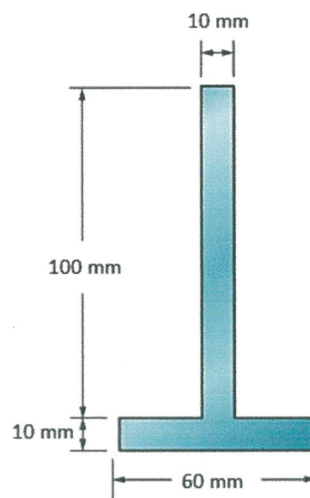


Figure Q1(b)

FINAL EXAMINATION

SEMESTER/SESSION : SEM II /2016/2017 PROGRAMME : BDD
 COURSE NAME : SOLID MECHANICS I COURSE CODE : BDA10903

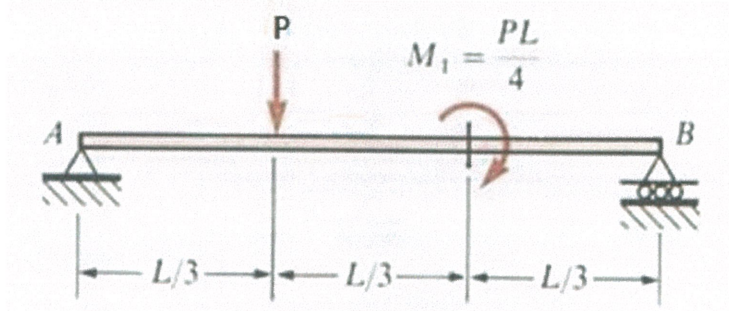


Figure Q2(a)

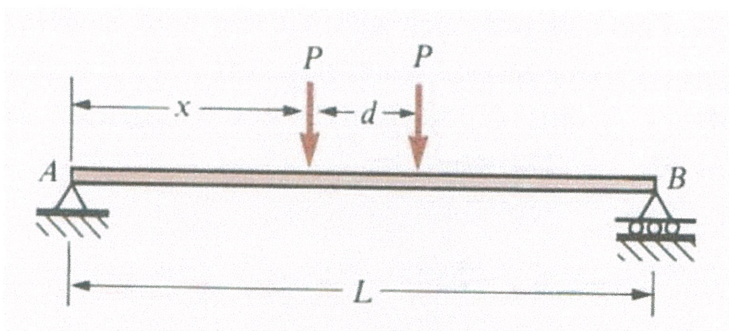


Figure Q2(b)

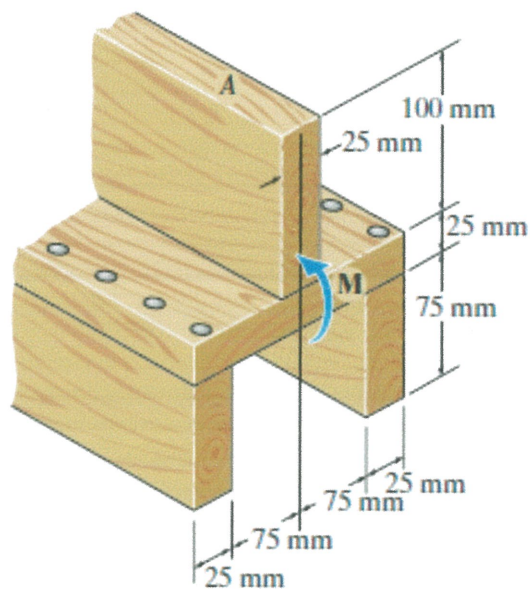


Figure Q3

FINAL EXAMINATION

SEMESTER/SESSION : SEM II /2016/2017 PROGRAMME : BDD
 COURSE NAME : SOLID MECHANICS I COURSE CODE : BDA10903

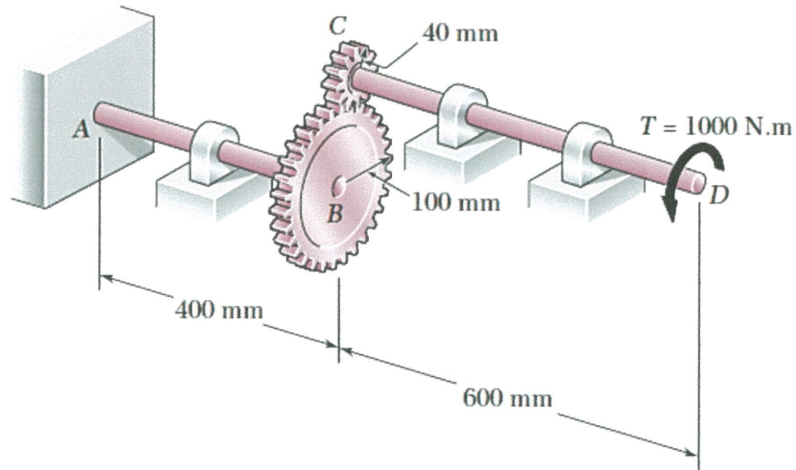


Figure Q4

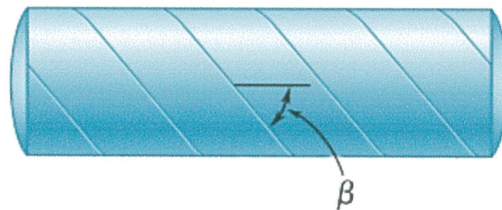


Figure Q5

FINAL EXAMINATION

PROGRAMME : SEM II /2016/2017 PROGRAMME : BDD
 COURSE CODE : SOLID MECHANICS I COURSE CODE : BDA10903

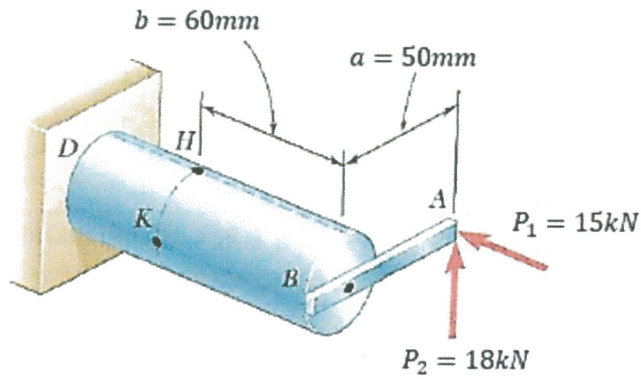


Figure Q6(a)

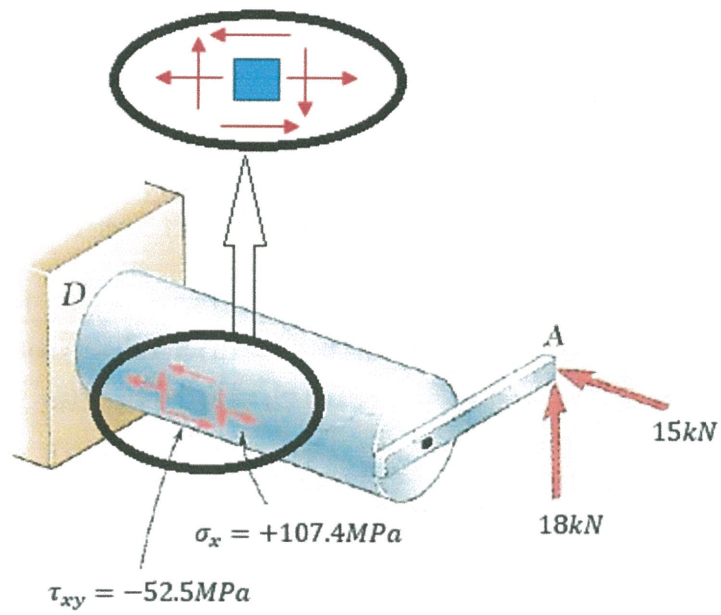


Figure Q6(b)

FINAL EXAMINATION

PROGRAMME : SEM II /2016/2017 PROGRAMME : BDD
 COURSE CODE : SOLID MECHANICS I COURSE CODE : BDA10903

EQUATIONS

$$\sigma_{ave} = \frac{P}{A}$$

$$\delta = \sum_i \frac{P_i L_i}{A_i E_i}$$

$$\delta_T = \alpha(\Delta T)L$$

$$n = \frac{E_2}{E_1}$$

$$\sigma_{ave} = \frac{\sigma_x + \sigma_y}{2} \quad R = \sqrt{\left(\frac{\sigma_x - \sigma_y}{2}\right)^2 + \tau_{xy}^2}$$

$$\sigma_{max,min} = \frac{\sigma_x + \sigma_y}{2} \pm \sqrt{\left(\frac{\sigma_x - \sigma_y}{2}\right)^2 + \tau_{xy}^2}$$

$$\tan 2\theta_p = \frac{2\tau_{xy}}{\sigma_x - \sigma_y}$$

$$\sigma_1 = \frac{pr}{t}$$

$$\sigma_2 = \frac{pr}{2t}$$

$$\tau_{max} = \frac{Tc}{J} \quad \text{and} \quad \tau = \frac{T\rho}{J}$$

$$J = \frac{1}{2} \pi c^4$$

$$J = \frac{1}{2} \pi (c_2^4 - c_1^4)$$

$$\gamma_{max} = \frac{\tau_{max}}{G} = \frac{Tc}{JG}$$

$$\phi = \sum_i \frac{T_i L_i}{J_i G_i}$$

$$T = \frac{P}{\omega} = \frac{P}{2\pi f}$$

$$\tau_{max} = \frac{T}{c_1 ab^2} \quad \phi = \frac{TL}{c_2 ab^3 G}$$

$$\sigma_x = -\frac{My}{I}$$

$$\frac{1}{\rho} = \frac{M}{EI}$$

$$\bar{Y} = \frac{\sum \bar{y}A}{\sum A} \quad I_x = \sum (\bar{I} + Ad^2)$$