

CONFIDENTIAL



UTHM

Universiti Tun Hussein Onn Malaysia

UNIVERSITI TUN HUSSEIN ONN MALAYSIA

**FINAL EXAMINATION
SEMESTER I
SESSION 2018/2019**

COURSE NAME : ENGINEERING MATHEMATICS IV
COURSE CODE : BDA 34003
PROGRAMME : BDD
EXAMINATION DATE : DECEMBER 2018 / JANUARY 2019
DURATION : 3 HOURS
INSTRUCTIONS : (a) ANSWER ALL QUESTIONS IN
PART A
(b) ANSWER TWO (2) QUESTIONS
IN PART B

THIS QUESTION PAPER CONSISTS OF **EIGHT (8)** PAGES

CONFIDENTIAL

TERBUKA

PART A: ANSWER ALL QUESTIONS

- Q1 a) State a suitable numerical method that can be used to determine
- The largest eigenvalue
 - The smallest eigenvalue

(2 marks)

- b) Given

$$A = \begin{pmatrix} 0 & 11 & -5 \\ -2 & 17 & -7 \\ -4 & 26 & -10 \end{pmatrix}.$$

- Evaluate the largest eigenvalue using an appropriate numerical method. Use $x_0 = (1 \ 1 \ 1)^T$ and iterate until $|\lambda_{k+1} - \lambda_k| \leq 0.05$.
- Compare the obtained solution in Q1(b)(i) with reference to the solution given by the characteristic equation in terms of absolute error.

(10 marks)

(8 marks)

- Q2 State a suitable numerical method that can be used to determine The conservation of heat can be used to develop a heat balance for a long thin rod, as illustrated in **Figure Q2**. If the rod is not insulated along its length, and the system is at a steady state, the differential equation that results is

$$\frac{d^2T}{dx^2} + h'(T_a - T) = 0$$

Where h' is a heat transfer coefficient (cm^{-2}) that parameterizes the rate of heat dissipation to the surrounding air and T_a is the temperature of the surrounding air ($^{\circ}\text{C}$). The conditions imposed to solve the differential equation can be fixed as $T(0) = T_1$ and $T(L) = T_2$.

Consider a 10 cm rod with $T_a = 20$, $T_1 = 40$, $T_2 = 200$ and $h' = 0.01$.

- Transform the problem into a boundary value problem.
- By dividing the length of rod into five equidistant nodes, deconstruct the differential equation using central finite difference approximation.

(3 marks)

(7 marks)

- (c) Determine the temperature at all nodes using finite difference approach. (6 marks)
- (d) Compare the accuracy of the obtained solution in terms of absolute error with reference to the analytical solution given by $T = 73.4523e^{0.1x} - 53.4523e^{-0.1x} + 20$. (4 marks)

Q3 The heat transfer performance of a new conductor bar of length 20 cm is under inspection. The material is fully insulated such that the heat transfer is only one dimensional in axial direction (x-axis). The left end is maintained at temperature of 100°C, while the right end is maintained at temperature of 20°C, for $t > 0$. The distribution of the initial temperatures is shown in **Figure Q3**. The unsteady state heat conduction equation is given by

$$\frac{\partial T}{\partial t} - \kappa \frac{\partial^2 T}{\partial x^2} = 0$$

Where κ is a thermal diffusivity of material and x is the longitudinal coordinate of the bar. The thermal diffusivity of the material is given as $\kappa = 10 \text{ cm}^2/\text{s}$, and $\Delta t = 2$ second.

- (a) By considering numerical differentiation $\frac{\partial^2 T}{\partial x^2} = \frac{T(x+1,t) - 2T(x,t) + T(x-1,t)}{\Delta x^2}$ and $\frac{\partial T}{\partial t} = \frac{T(x,t+1) - T(x,t)}{\Delta t}$, deduce that the temperature distribution along the bar at point $(x,t+1)$ in explicit finite-difference form is given by

$$T(x,t+1) = 0.8T(x-1,t) - 0.6T(x,t) + 0.8T(x+1,t)$$

(6 marks)

- (b) Draw the finite difference grid to predict the temperature of all points up to 4 seconds. Label all unknown temperatures on the grid. (6 marks)
- (c) Determine all the unknown temperatures. (4 marks)
- (d) Analyze why the heat conduction in this question is more suitable to be solved using the implicit finite-difference approach. (4 marks)

TERBUKA

PART B: ANSWER TWO (2) QUESTIONS

- Q4** a) The velocity of a car driven in a highway is give as $v(t) = t^3 - 20t^2 + 18$
- (i) Use the secant method to locate the location of t where the car has zero velocity. Stop the iteration until $|x_{i+1} - x_i| \leq 0.05$. Start the interval $[2,5]$ (5 marks)
 - (ii) Plot the convergence error graphically and discuss the trend. (3 marks)

- b) The upward velocity of Atlas V rocket model is represented as a function $v(t) = e^{0.091t}$ in the **Table Q4(b)**

Table Q4(b): The upward velocity of rocket at different time

t (sec)	0	20	40	70
v (ms ⁻¹)				

- (i) Calculate the upward velocity of the rocket and complete the **Table Q4(b)**. (2 marks)
- (ii) Then, identify $v(60)$ by using Newton divided difference method. (5 marks)
- (iii) If (50, 94.6324) is added into the data above, determine $v(60)$ by using Newton divided difference method. (5 marks)


- Q5** a) Formula One is about to commence. Ferrari team develops a simulation on the track The velocity equation can be expressed as;

$$v(t) = 25t^3 + 15t^2 + 10t$$

Where the unit of velocity, v is measured in m/s and t in second.

By using $h = 10^{-5}$, determine the acceleration of the Ferrari car at $t = 3$ seconds using;

- (i) 3-point central difference (5 marks)
- (ii) 5-point difference (5 marks)



- b) The time required to fulfill 50% lubricant to be pumped into an orifice is given by;

$$T = - \int_{1.22 \times 10^{-6}}^{0.61 \times 10^{-6}} \left(\frac{6.73x + 4.3025 \times 10^{-7}}{2.316 \times 10^{-11}x} \right) dx$$

- (i) Approximate the time to pump 50% of lubricant by using 2-point Gauss Quadrature. (8 marks)
- (ii) Considering the relative error, analyze the obtained result in **Q5(b)(i)** if the exact value is 1% less from the result in **Q5(b)(i)** (2 marks)

- Q6** a) Use the Gauss-Seidel Method to obtain the solution of the following system:

$$0.4x_1 - 4x_2 + 1.5x_3 = 4.56$$

$$7x_1 + 0.2x_2 - 1.9x_3 = 1.73$$

$$2.5x_1 - 1.6x_2 + 5x_3 = 8.45$$

Stop the iteration until $\max \{|x^{k+1} - x_t^k|\} < 0.003$.

(10 marks)

- b) For a simple RL circuit, Kirchoff's voltage law requires that

$$L \frac{di}{dt} + Ri = 0$$

Where i = current, L = inductance, and R = resistance. Given that $L = 1$, $R = 2$ and $i(0) = 0.6$.

- (i) Solve for i using Midpoint method over the interval from $t = 0$ to $t = 1$. Use $h = 0.25$. (5 marks)
- (ii) Solve the differential equation analytically. Subsequently, find the difference between the value obtained by Midpoint method and actual value at $t = 1$. (5 marks)

-END OF QUESTIONS-



FINAL EXAMINATION

SEMESTER/SESSION: SEM I/ 2018/2019

PROGRAMME : BDD

COURSE NAME : ENGINEERING MATHEMATICS IV

COURSE CODE: BDA 34003

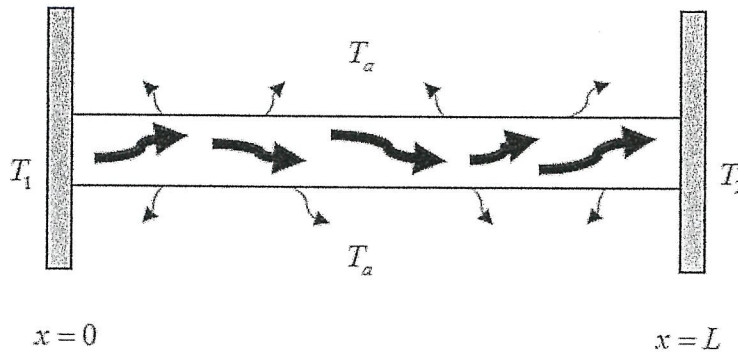


Figure Q2: Heat balance for a long thin rod

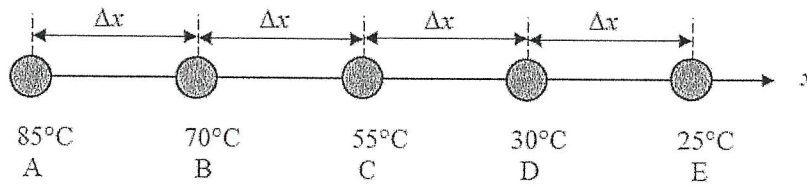


Figure Q3: Distribution of the initial temperatures

TERBUKA

FINAL EXAMINATION

SEMESTER/SESSION: SEM I/ 2018/2019

PROGRAMME : BDD

COURSE NAME : ENGINEERING MATHEMATICS IV

COURSE CODE: BDA 34003

FORMULA

Newton Raphson

$$x_{i+1} = x_i - \frac{f(x_i)}{f'(x_i)}$$

Secant

$$x_{i+1} = \frac{x_{i-1}y(x_i) - x_i y(x_{i-1})}{y(x_i) - y(x_{i-1})}$$

Doolittle

$$\begin{pmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{pmatrix} = \begin{pmatrix} 1 & 0 & 0 \\ l_{21} & 1 & 0 \\ l_{31} & l_{32} & 1 \end{pmatrix} \begin{pmatrix} u_{11} & u_{12} & u_{13} \\ 0 & u_{22} & u_{23} \\ 0 & 0 & u_{33} \end{pmatrix}$$

Crout

$$\begin{pmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{pmatrix} = \begin{pmatrix} l_{11} & 0 & 0 \\ l_{21} & l_{22} & 0 \\ l_{31} & l_{32} & l_{33} \end{pmatrix} \begin{pmatrix} 1 & u_{12} & u_{13} \\ 0 & 1 & u_{23} \\ 0 & 0 & 1 \end{pmatrix}$$

Thomas

$$\begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{pmatrix} \begin{pmatrix} \alpha_1 & 0 & 0 & 0 \\ l_{21} & \alpha_1 & 0 & 0 \\ l_{31} & l_{32} & \alpha_1 & 0 \\ l_{41} & l_{42} & l_{43} & \alpha_1 \end{pmatrix} \begin{pmatrix} 1 & \beta_1 & 0 & 0 \\ 0 & 1 & \beta_2 & 0 \\ 0 & 0 & 1 & \beta_3 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

Gauss-Seidel

$$x_i^{(k+1)} = \frac{b_i - \sum_{j=1}^{i-1} a_{ij} x_j^{(k+1)} - \sum_{j=i+1}^n a_{ij} x_j^{(k)}}{a_{ii}}, \forall i = 1, 2, \dots, n$$

Lagrange

$$L_i(x) = \prod_{\substack{j=0 \\ j \neq i}}^n \frac{(x - x_j)}{(x_i - x_j)}$$

$$f(x) = P_n(x) = \sum_{i=0}^n L_i(x) f_i$$

Newton Divided

$$f(x) = a_0 + a_1(x - x_0) + a_2(x - x_0)(x - x_1)$$

Spline

$$h_k = (x_{k+1} - x_k)$$

$$h_k m_k + 2(h_k + h_{k+1})m_{k+1} + h_{k+1}m_{k+2} = b_k$$

$$a_i = \frac{m_{i+1} - m_i}{6h_i}$$

$$d_k = \frac{f_{k+1} - f_k}{h_k}$$

$$b_i = \frac{m_i}{2}$$

$$b_k = 6(d_{k+1} - d_k)$$

$$S_i(x) = a_i(x - x_i)^3 + b_i(x - x_i)^2 + c_i(x - x_i) + d_i$$

$$c_i = \left(\frac{f_{i+1} - f_i}{h_i} \right) - \left(\frac{2h_i m_i + h_i m_{i+1}}{6} \right)$$

$$d_i = f_i$$

2 Point Forward

$$y'(x) = \frac{y(x+h) - y(x)}{h}$$

2 Point Backward

$$y'(x) = \frac{y(x) - y(x-h)}{h}$$

3 Point Central

$$y'(x) = \frac{y(x+h) - y(x-h)}{2h}$$

$$y''(x) = \frac{y(x+h) - 2y(x) + y(x-h)}{h^2}$$

3 Point Forward

$$y'(x) = \frac{-y(x+2h) + 4y(x+h) - 3y(x)}{2h}$$

3 Point Backward

$$y'(x) = \frac{3y(x) - 4y(x-h) + y(x-2h)}{2h}$$

5 Point

$$y'(x) = \frac{-y(x+2h) + 8y(x+h) - 8y(x-h) + y(x-2h)}{12h}$$

$$y''(x) = \frac{-y(x+2h) + 16y(x+h) - 30y(x) + 16y(x-h) - y(x-2h)}{12h^2}$$

FINAL EXAMINATION

SEMESTER/SESSION: SEM I/ 2018/2019

PROGRAMME : BDD

COURSE NAME : ENGINEERING MATHEMATICS IV

COURSE CODE: BDA 34003

FORMULA

Trapezoidal

$$\int_{x_0}^{x_n} y(x)dx = \frac{h}{2}(y_0 + y_n + 2 \sum_{i=1}^{n-1} y_i)$$

Simpson

$$\int_{x_0}^{x_n} y(x)dx = \frac{h}{3}(y_0 + y_n + 4 \sum_{i=1,3,5..}^{n-1} y_i + 2 \sum_{i=2,4,6..}^{n-2} y_i)$$

$$\int_{x_0}^{x_n} y(x)dx = \frac{3}{8}h[y_0 + y_n + 3(y_1 + y_2 + y_4 + y_5 + \dots) + 2(y_3 + y_6)]$$

Gauss Quadrature

$$x_\xi = \frac{1}{2}[(1 - \xi)x_0 + (1 + \xi)x_n]$$

$$I = \left(\frac{x_n - x_0}{2}\right) I_\xi$$

$$I_\xi = R_1\phi(\xi_1) + R_2\phi(\xi_2) + \dots + R_n\phi(\xi_n)$$

n	$\pm\xi_j$	R_j
1	0.0	2.0
2	0.5773502692	1.0
3	0.7745966692 0.0	0.555555556 0.888888889
4	0.8611363116 0.3399810436	0.3478548451 0.6521451549
5	0.9061798459 0.5384693101 0.0	0.2369268851 0.4786286705 0.568888889

Characteristic Equation

$$|[A] - \lambda[I]| = 0 \quad \{V\}^{k+1} = \frac{[A]\{V\}^k}{\lambda_{k+1}}$$

Euler Method

$$y(x_{i+1}) = y(x_i) + hy'(x_i)$$

Midpoint

$$f(x_i, y_i) = y'(x_i)$$

$$y_{i+1} = y_i + k_2$$

$$k_1 = hf(x_i, y_i)$$

$$k_2 = hf\left(x_i + \frac{h}{2}, y_i + \frac{k_1}{2}\right)$$

Heun's

$$f(x_i, y_i) = y'(x_i)$$

$$y_{i+1} = y_i + \frac{1}{4}k_1 + \frac{3}{4}k_2$$

$$k_1 = hf(x_i, y_i)$$

$$k_2 = hf\left(x_i + \frac{2h}{3}, y_i + \frac{2k_1}{3}\right)$$

TERBUKA